

E14 CR-DP-Flame 6W White 220V



Technical (Ta=25°C):

Item	Unit	E14 CR-DP-Flame 6W White 220V
Total Power	W	6
LED power	W	60*0.1W
Size	mm	Φ36*135/106
Luminous flux (Typ)	Lm(Ttp)	530
Lighting effective	Lm/W	90
Luminous	Lux@1M	73
	Lux@2M	18
	Lux@3M	8
Forward current	mA	27
Rated voltage	V/Hz	100-240V AC50/60Hz
CCT	K	5500-6500K
Ra	Ra	Typ:75
Emitting angle	Degree	300
Design life	Hrs	>40000hours
Life	Hrs	>50000hours


Max. Absolutely using rate (Ta=25°C):

Item	Symbol	Max. using range	Unit
Input voltage	V	90-264V AC47-63Hz	V/Hz
Working current	mA	Max.30	mA
Antistatic ability	ESD	Space discharge 8kV,contact discharge 4kV	V
Working temperature	Topr	-25-+45	°C
Storage temperature	Tstg	-30-+50	°C


Packing:

Model number	Packing size	QTY/CTN	N.W.:	G.W.:
E14 CR-DP-Flame 6W	250*250*340mm	50pcs	4.2Kg	7.5 Kg

Illuminance Graph: (E14 CR-DP-Flame 6W White 220V)

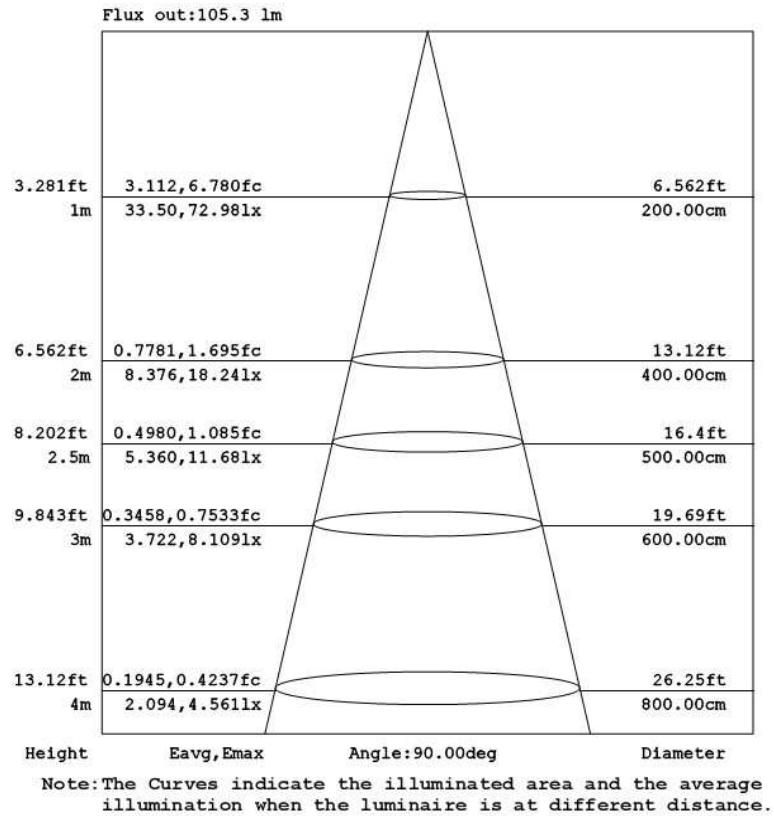

Spectrogram:

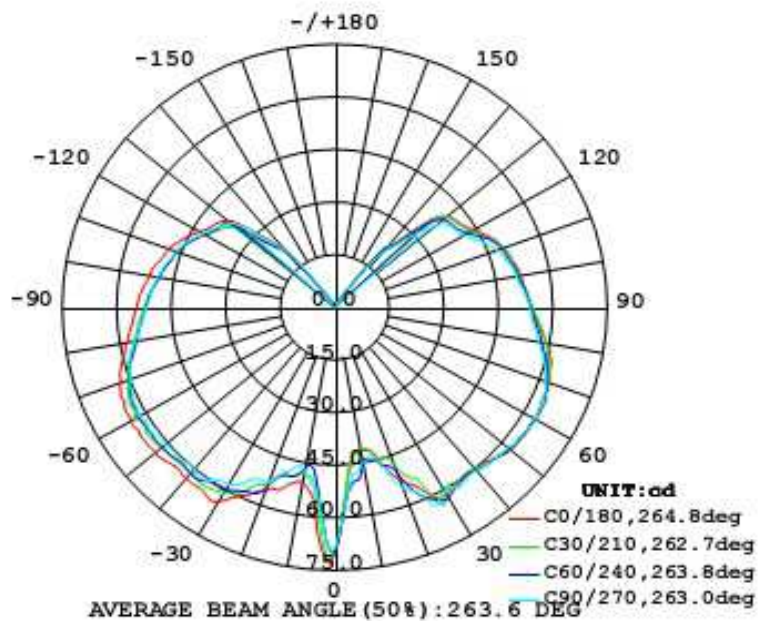

Quality	CE,RoHS certificate; 3 years' warranty	
Patent number	ZL201220299318.0	
MOQ	50pcs	
Delivery time	in 10 working days after receipt of payment	
Terms of payment	30% deposit and the balance 70% payment off before shipment	
Unit price (EX-Work)	<300pcs	>1000pcs